




Pat'd PCT/IB 03/03204 01 FEB 2005  
22 JUL 2003

INVESTOR IN PEOPLE




The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

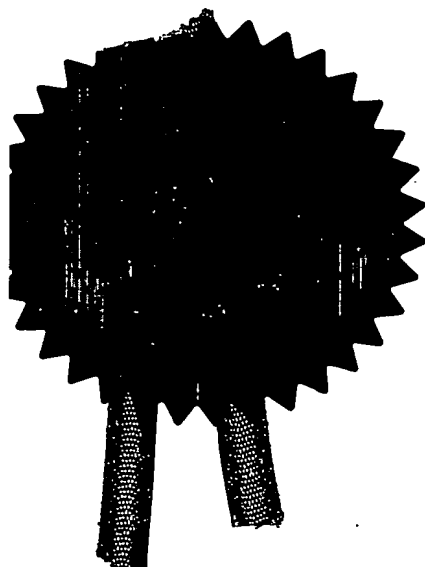

Signed

Dated 20 May 2003

**BEST AVAILABLE COPY**

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

1/77

Patents Form 1

THE PATENT OFFICE

Patents Act 1977  
(Rule 16)

A  
- 6 AUG 2002

The  
Patent  
Office

NEWPORT

Request for grant of a patent

(See notes on the back of this form. You can  
also get an explanatory leaflet from the Patent  
Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP10 8QQ

1. Your reference	PHGB 020125		
2. Patent application number (The Patent Office will fill in this part)	0218172.5		6 AUG 2002
3. Full name, address and postcode of the or of each applicant (underline all surnames)	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS  Patents ADP Number (if you know it) 75 86605002  If the applicant is a corporate body, give the country/state of its incorporation THE NETHERLANDS		
4. Title of the invention	ELECTROLUMINESCENT DISPLAY DEVICE		
5. Name of your agent (if you have one)	PAUL LEWIS WILLIAMSON  "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) Philips Intellectual Property & Standards Cross Oak Lane Redhill Surrey RH1 5HA  Patents ADP number (if you know it) 7163322002		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority Application number	Date of filing
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

Continuation sheets of this form

Description	9
Claims(s)	3
Abstract	1
Drawings	5 only

CF

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and

search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

5/8/02

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5280

P L WILLIAMSON

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered "Yes" Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

## DESCRIPTION

## ELECTROLUMINESCENT DISPLAY DEVICE

5 The invention relates to electroluminescent display devices, for example using organic LED devices such as polymer LEDs.

Matrix display devices employing electroluminescent, light-emitting, display elements are well known. The display elements may comprise organic thin film electroluminescent elements, for example using polymer materials, or  
10 else light emitting diodes (LEDs) using traditional III-V semiconductor compounds. Recent developments in organic electroluminescent materials, particularly polymer materials, have demonstrated their ability to be used practically for video display devices. These materials typically comprise one or more layers of a semiconducting conjugated polymer sandwiched between a  
15 pair of electrodes, one of which is transparent and the other of which is of a material suitable for injecting holes or electrons into the polymer layer. An example of such is described in an article by D. Braun and A.J.Heeger in Applied Physics Letters 58(18) p.p. 1982-1984 (6 May 1991).

The polymer material can be fabricated using a CVD process, or simply  
20 by a spin coating technique using a solution of a soluble conjugated polymer. Ink-jet printing may also be used. Organic electroluminescent materials exhibit diode-like I-V properties, so that they are capable of providing both a display function and a switching function, and can therefore be used in passive type displays. Alternatively, these materials may be used for active matrix display  
25 devices, with each pixel comprising a display element and a switching device for controlling the current through the display element.

Display devices of this type have current-addressed display elements. As a result, drive schemes used in the more mature technology of liquid crystal displays are typically not appropriate for electroluminescent displays. A  
30 conventional, analogue drive scheme for electroluminescent displays involves supplying a controllable current to the display element. It is known to provide a current source transistor as part of the pixel configuration, with the gate

voltage supplied to the current source transistor determining the current through the display element. A storage capacitor holds the gate voltage after the addressing phase. However, different transistor characteristics across the substrate give rise to different relationships between the gate voltage and the source-drain current, and artefacts in the displayed image result.

Particularly at low brightness levels, these displays suffer non-uniformity.

Digital drive schemes have also been proposed. In such schemes, the LED device is effectively driven to two possible voltage levels. This overcomes the non-uniformity problem, as the pixels are no longer driven to low brightness levels. This also reduces the power consumption in the pixel circuit, because a transistor is no longer required to operate in the linear region as a current source. Instead, all transistors can be fully on or fully off, which reduces power consumption. Such a drive scheme is less sensitive to transistor characteristic variations for the same reason. This approach only gives two possible pixel outputs. However, grey scale pixel outputs can be achieved by a number of methods.

In one approach, pixels can be grouped to form larger pixels. Pixels within the group can be addressed independently, so that a grey scale is produced which is a function of the number of pixels within the group activated. This is known as an area ratio method. A drawback of this approach is the reduced resolution of the display and the increased pixel complexity.

In an alternative approach, pixels can be turned on and off more quickly than the frame rate, so that a grey scale is implemented as function of the duty cycle with which the pixel is turned on. This is known as a time ratio method. For example, a frame period may be divided into sub-frame periods in the ratio 1:2:4 (giving 8 evenly spaced grey scale values). This increases the required driving capability (or else requires a reduction in the frame rate), and therefore increases the cost of the display.

According to a first aspect of the invention, there is provided an electroluminescent (EL) display device comprising an array of display pixels,

each display pixel comprising an EL display element and a current source circuit for driving a current through the EL display element in dependence on a data voltage, wherein the display device is operable in at least first and second phases within each frame period:

5       the first phase having a first duration and during which a first one of a first plurality of analogue drive currents can be driven through EL display element; and

10       the second phase having a second duration, different to the first duration, and during which a second one of a second plurality of analogue drive currents can be driven through EL display element, wherein the first and second ones of the plurality of analogue drive currents are independently selectable.

15       This device combines a time ratio method with an analogue drive scheme. During the different phases (two or more) the pixel may be driven to one of a number of analogue levels. Thus, one shorter phase may provide the higher resolution (smaller) increments and one longer phase may provide lower resolution (larger) increments. The combined output can then provide many more levels than the number of analogue drive levels. In turn, the lower brightness outputs can be achieved with a higher drive current, but over a  
20       short duration.

      The plurality of analogue drive levels can comprises a number  $n$  of drive levels, and wherein the duration of one phase is approximately  $n$  times the duration of the other phase.

25       In one embodiment, the first plurality of analogue drive currents is the same as the second plurality of analogue drive currents. In each phase,  $n$  levels (including zero) can then be combined to provide  $n^2$  analogue levels. For example 8 analogue levels (including zero) can be used to provide 6 bit (64 level) resolution. The lowest current drive level is then  $1/7$  of the highest current drive level.

30       In another embodiment, the first plurality of analogue drive currents comprises a first number  $n$  of drive current levels for providing the lowest  $n$  brightness levels (including zero), and the second plurality of analogue drive

currents comprises a second number  $m$  of non-zero drive current levels for providing the highest  $m$  brightness levels, where  $n+m$  is the total number of brightness levels. In this case, the shorter phase is used only for the first, lowest brightness levels. For the higher brightness levels, only the second  
5 phase is used. The number of levels  $m$  to which the pixel can be driven in the second phase is then higher than the number of levels  $n$  to which the pixel can be driven in the first phase. For example  $n$  can be 8 to provide the lowest 8 levels (0 to 7), and the 8th to 63rd levels can be provided by driving the pixels to one of 56 different levels in the second phase.

10 Each pixel can comprise a drive transistor, a storage capacitor for storing a gate voltage of the drive transistor and an address transistor for switching a data voltage to the gate of the drive transistor during an addressing phase. Thus, a conventional voltage addressed current source pixel can be used to implement the invention.

15 The display device of the invention may be used in a portable device, such as a mobile phone.

The invention also provides a method of driving an electroluminescent (EL) display device comprising an array of display pixels, each display pixel comprising an EL display element and a current source circuit for driving a  
20 current through the EL display voltage in dependence on a data voltage, the method comprising:

in a first phase having a first duration, driving a first one of a first plurality of analogue drive currents through EL display element; and

25 in a second phase having a second duration, different to the first duration, driving a second one of a second plurality of analogue drive currents through EL display element, wherein the first and second ones of the plurality of analogue drive currents are selected to provide a desired combined EL display element output.

30 Embodiments of display devices in accordance with the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 shows the layout of a conventional EL display device;

Figure 2 is a simplified schematic diagram of a known pixel circuit for current-addressing an EL display pixel; and

Figure 3 shows the possible drive levels in different phases of the drive scheme of a first embodiment of the invention;

Figure 4 shows how the levels of Figure 3 are used to provide a display of the 6th brightness level;

Figure 5 shows how the levels of Figure 3 are used to provide a display of the 50th brightness level;

Figure 6 shows the possible drive levels in different phases of the drive scheme of a second embodiment of the invention;

Figure 7 shows how the levels of Figure 6 are used to provide a display of the 6th brightness level;

Figure 8 shows how the levels of Figure 3 are used to provide a display of the 50th brightness level; and

Figure 9 shows a mobile telephone 40 incorporating a display 42 of the invention.

Referring to Figure 1, an active matrix addressed electroluminescent display device comprises a panel having a row and column matrix array of regularly-spaced pixels, denoted by the blocks 1 and comprising electroluminescent display elements 2 together with associated switching means, located at the intersections between crossing sets of row (selection) and column (data) address conductors 4 and 6. Only a few pixels are shown in the Figure for simplicity. In practice there may be several hundred rows and columns of pixels. The pixels 1 are addressed via the sets of row and column address conductors by a peripheral drive circuit comprising a row, scanning, driver circuit 8 and a column, data, driver circuit 9 connected to the ends of the respective sets of conductors.

The electroluminescent display element 2 comprises an organic light emitting diode, represented here as a diode element (LED) and comprising a pair of electrodes between which one or more active layers of organic



electroluminescent material is sandwiched. The display elements of the array are carried together with the associated active matrix circuitry on one side of an insulating support. Either the cathodes or the anodes of the display elements are formed of transparent conductive material. The support is of transparent material such as glass and the electrodes of the display elements 2 closest to the substrate may consist of a transparent conductive material such as ITO so that light generated by the electroluminescent layer is transmitted through these electrodes and the support so as to be visible to a viewer at the other side of the support. Typically, the thickness of the organic electroluminescent material layer is between 100 nm and 200nm. Typical examples of suitable organic electroluminescent materials which can be used for the elements 2 are known and described in EP-A-0 717446. Conjugated polymer materials as described in WO96/36959 can also be used.

Figure 2 shows in simplified schematic form a known pixel and drive circuitry arrangement. Each pixel 1 comprises the EL display element 2 and associated driver circuitry. The driver circuitry has an address transistor 16 which is turned on by a row address pulse on the row conductor 4. When the address transistor 16 is turned on, a voltage on the column conductor 6 can pass to the remainder of the pixel. In particular, the address transistor 16 supplies the column conductor voltage to a current source 20, which comprises a drive transistor 22 and a storage capacitor 24. The column voltage is provided to the gate of the drive transistor 22, and the gate is held at this voltage by the storage capacitor 24 even after the row address pulse has ended.

The drive transistor 22 is a PMOS device, and the circuit is formed using low temperature polysilicon (LTPS). The transistor characteristics of LTPS transistors are non-uniform, and the effect of this non-uniformity is to make the current source operation of the pixel circuit non-uniform. As the brightness of the LED is dependent on the current, the display is non-uniform in brightness.

There are proposals to use current addressed pixels, in which the pixel circuit includes a current mirror circuit for sampling a drive current. However,

this increases the pixel complexity, and it can be preferable to resolve the uniformity problem whilst retaining voltage addressed pixels.

These voltage addressed pixels tend to be non-uniform at low pixel currents but tend to be acceptable at higher current.

5       The invention provides a drive scheme by which the pixel is driven only at high currents, but which maintains a large number of analogue drive levels, for example meeting the 6 bit per pixel standard.

Figure 3 shows the possible drive levels in a first drive scheme of the invention. The frame period is divided into two phases 30,32. This requires all  
10       pixels to be addressed twice within each frame. For example, all pixels can be addressed once, row by row at the beginning of the first phase 30, the full pixel array then needs to be addressed in time for the beginning of the second phase 32, when all pixels are re-addressed in the same row by row order.

This may impose a shorter available row address period, but this may  
15       not be a problem for small displays (having less rows) for example for portable products, or where the frame rate can be lower, again for example for portable equipment.

The first phase 30 has a relatively short duration, and one of 8 analogue drive current levels 31 can be driven through EL display element (including  
20       zero) in this phase. As a result of the short duration, these 8 levels provide the 8 lowest brightness levels (i.e. levels 0 to 7).

The second phase 32 has a relative long duration, in particular 8 times longer than the duration of the first phase. In the example of Figure 3, the same 8 analogue drive current levels 33 can be driven through EL display  
25       element, so that the second phase 32 provides brightness levels 0, 8, 16, 24, 32, 40, 48 and 56. The levels for the first and second phases are independently selectable, so that addition of the brightness outputs from the two phases enables all 64 levels to be achieved.

Figure 4 shows how the levels of Figure 3 are used to provide a display  
30       of the 6th brightness level. In this case, the pixel is driven to the 6th level in the first phase and is off in the second phase.

Figure 5 shows how the levels of Figure 3 are used to provide a display of the 50th brightness level. In this case, the pixel is driven to the 2nd level in the first phase and is driven to the 6th level in the second phase.

Figure 6 shows the possible drive levels in different phases for a second this drive scheme of the invention. In this embodiment, the levels 31 to which pixels are driven in the first phase 30 provide the lowest n brightness levels, but the second phase 32 uses a different greater number of drive current levels 34 for providing (alone) the remaining brightness levels.

For example, the first phase can again have 8 levels to provide the lowest 8 levels (including zero), and the 8th to 63rd levels can be provided by driving the pixels to one of 56 different levels 34 in the second phase. For this purpose, the second phase is again 8 times longer than the first phase. To provide the highest level (63), the peak drive current in the second phase is higher as shown in Figure 6, so that the average current is equal to the peak drive current in the first phase 30 despite the first phase being turned off. The peak current in the second phase (using a normalised scale) needs to be  $63/8$  (7.875).

Figure 7 shows how the levels of Figure 6 are used to provide a display of the 6th brightness level. This is achieved using only the first phase 30. Figure 8 shows how the levels of Figure 3 are used to provide a display of the 50th brightness level. In this case, only the second phase is used, and is driven to a level of  $50/8$ .

As mentioned above, the display device of the invention may be used in a portable device, such as a mobile phone. Figure 9 shows a mobile telephone 40 incorporating a display 42 of the invention.

The pixel circuits described above are only examples of possible pixel structures which can be improved by the invention. In particular, any pixel design for providing a fixed voltage to the EL display element can be improved using the teaching of the invention in order to increase the minimum drive current. This may be accompanied by a reduction in the number of drive levels, or this may not be desired. The required driver circuits for providing the closely spaced voltage drive levels are readily available.

Specific examples have been given above with two phases, and with 7 voltage levels in the first phase. However, there may be more than two phases, scaling in duration in an exponential manner (for example 1:4:16 ... or 1:3:9...).

5 In such cases, the number of levels scales accordingly. The further the number of levels is reduced in the first phase, the smaller the difference between the highest and lowest drive current, thereby reducing the non-uniformity effect. However, an essentially analogue drive scheme is maintained so that multiple level (for example 6 bit) resolution is easily  
10 obtained. In the examples above, the lowest drive current is  $1/7$  (Figure 3) and  $1/7.875$  (Figure 6) of the peak drive current.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the field of matrix electroluminescent displays and  
15 component parts thereof and which may be used instead of or in addition to features already described herein.

## CLAIMS

1. An electroluminescent (EL) display device comprising an array of display pixels, each display pixel comprising an EL display element and a current source circuit for driving a current through the EL display element in dependence on a data voltage, wherein the display device is operable in at least first and second phases within each frame period:

the first phase having a first duration and during which a first one of a first plurality of analogue drive currents can be driven through EL display element; and

the second phase having a second duration, different to the first duration, and during which a second one of a second plurality of analogue drive currents can be driven through EL display element, wherein the first and second ones of the plurality of analogue drive currents are independently selectable.

2. A device as claimed in claim 1, wherein the first plurality of analogue drive currents comprises a number  $n$  of drive current levels including zero, and wherein the duration of one phase is approximately  $n$  times the duration of the other phase.

3. A device as claimed in claim 2, wherein  $n$  is 8.

4. A device as claimed in any preceding claim, wherein the first plurality of analogue drive currents is the same as the second plurality of analogue drive currents.

5. A device as claimed in any one of claims 1 to 3, wherein the first plurality of analogue drive currents comprises a first number  $n$  of drive current levels for providing the lowest  $n$  non-zero brightness levels, and the second plurality of analogue drive currents comprises a second number  $m$  of non-zero

drive current levels for providing the highest  $m$  brightness levels, where  $n+m$  is the total number of brightness levels.

6. A device as claimed in any preceding claim, wherein each pixel  
5 comprises a drive transistor, a storage capacitor for storing a gate voltage of the drive transistor and an address transistor for switching a data voltage to the gate of the drive transistor during an addressing phase.

7. A portable electronic device comprising a display device as claimed in  
10 any preceding claim.

8. A method of driving an electroluminescent (EL) display device comprising an array of display pixels, each display pixel comprising an EL display element and a current source circuit for driving a current through the  
15 EL display voltage in dependence on a data voltage, the method comprising:

in a first phase having a first duration, driving a first one of a first plurality of analogue drive currents through EL display element; and

in a second phase having a second duration, different to the first duration, driving a second one of a second plurality of analogue drive currents  
20 through EL display element, wherein the first and second ones of the plurality of analogue drive currents are selected to provide a desired combined EL display element output.

9. A method as claimed in claim 8, wherein the plurality of analogue drive  
25 levels comprises a number  $n$  of drive levels, and wherein the duration of one phase is approximately  $n$  times the duration of the other phase.

10. A method as claimed in claim 9, wherein  $n$  is 8.

30 11. A method as claimed in any one of claims 8 to 10, wherein the first plurality of analogue drive currents is the same as the second plurality of analogue drive currents.

12. A method as claimed in any one of claims 8 to 10, wherein the first plurality of analogue drive currents comprises a first number  $n$  of non-zero drive current levels for providing the lowest  $n$  brightness levels excluding zero,  
5 and the second plurality of analogue drive currents comprises a second number  $m$  of non-zero drive current levels for providing the highest  $m$  brightness levels, where  $n+m$  is the total number of non-zero brightness levels.

## ABSTRACT

## ELECTROLUMINESCENT DISPLAY DEVICE


5

An electroluminescent (EL) display device has current-driven pixels and is operable in at least two phases within each frame period. In one phase, one of a first plurality (31) of analogue drive currents can be driven through EL display element. In another longer phase, one of a second plurality (33) of analogue drive currents is independently driven through EL display element. This device combines a time ratio method with an analogue drive scheme. A shorter phase may provide the higher resolution (smaller) increments and one longer phase may provide lower resolution (larger) increments. Low brightness outputs can be achieved with a higher drive current, but over a short duration, which reduces non-uniformity in the pixel output.

10

15

[Fig 3]

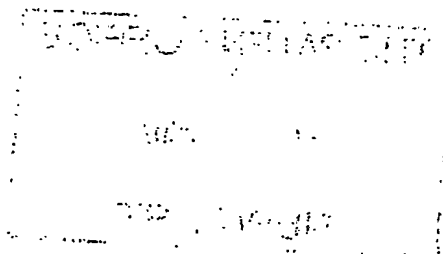



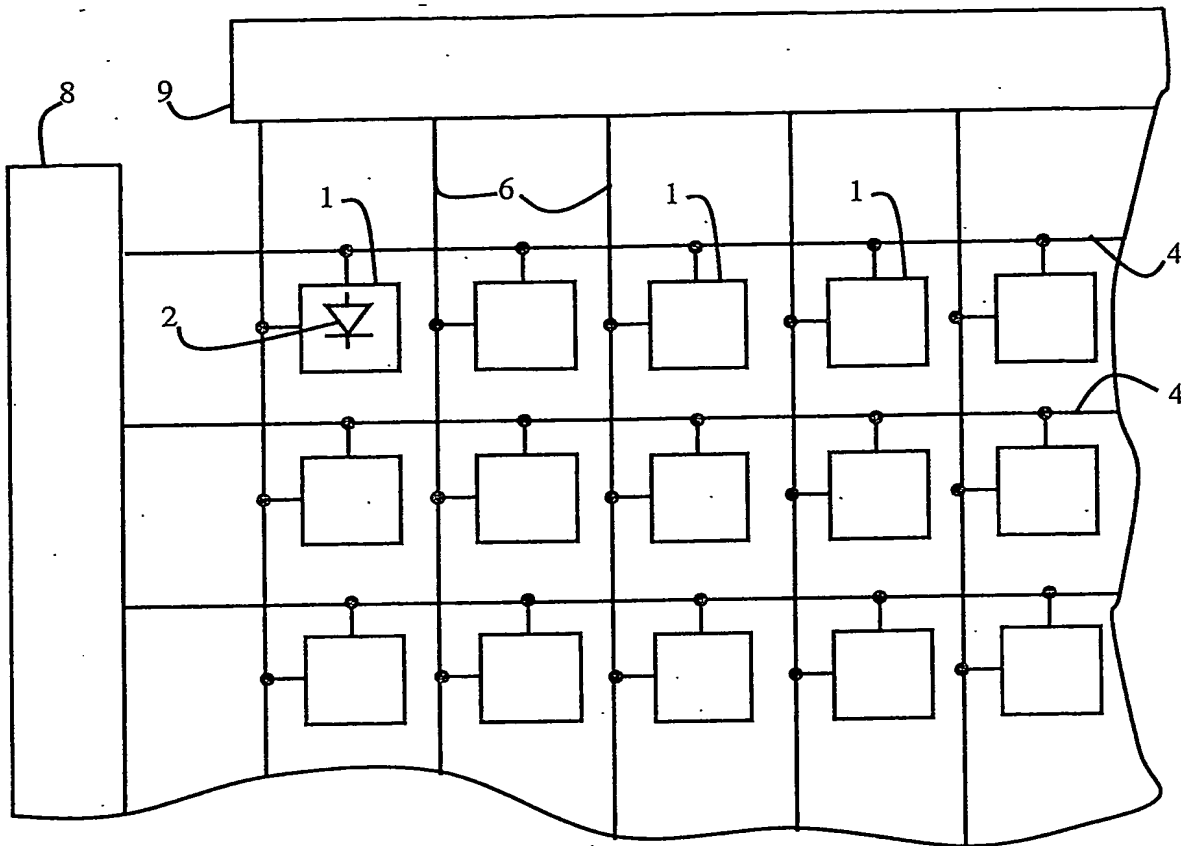


FIG. 1

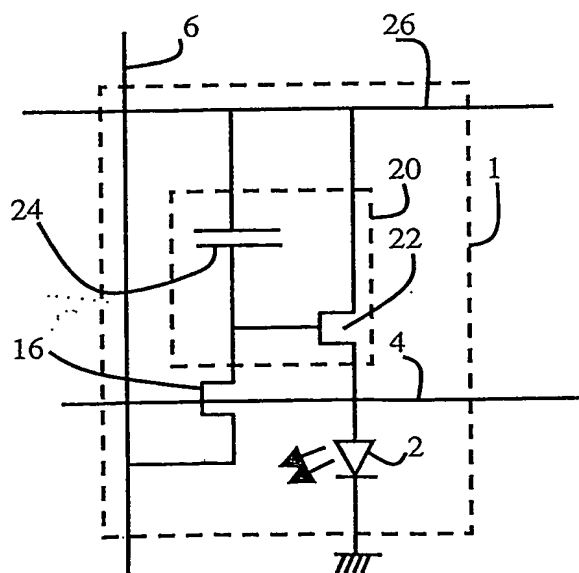


FIG. 2

Pixel Drive Current

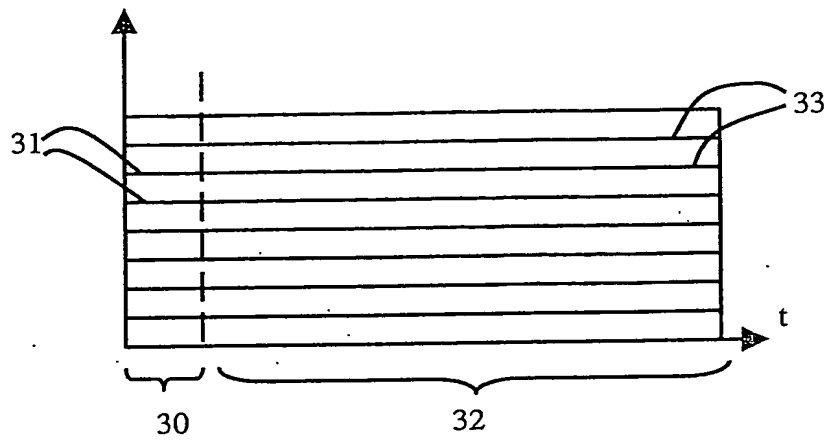


FIG. 3

Pixel Drive Current

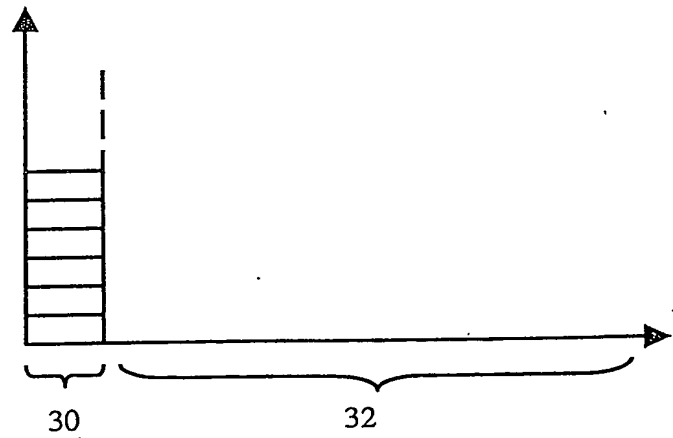


FIG. 4

Pixel Drive Current

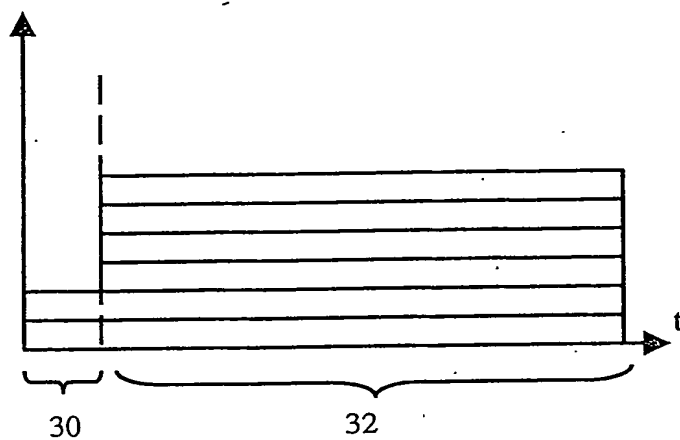


FIG. 5

Pixel Drive Current

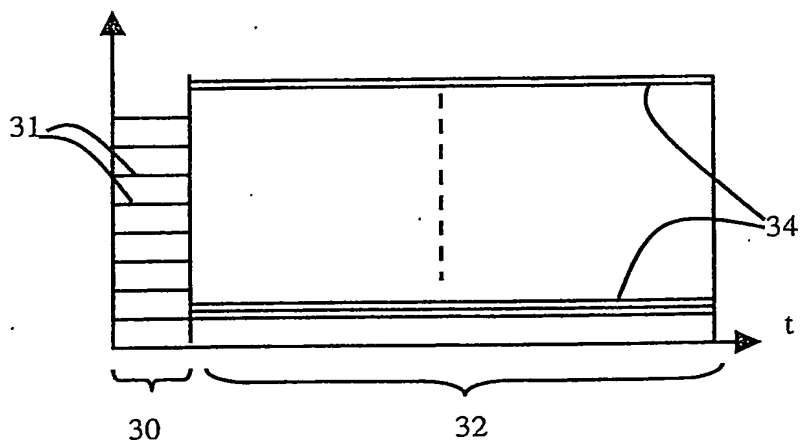


FIG. 6

Pixel Drive Current

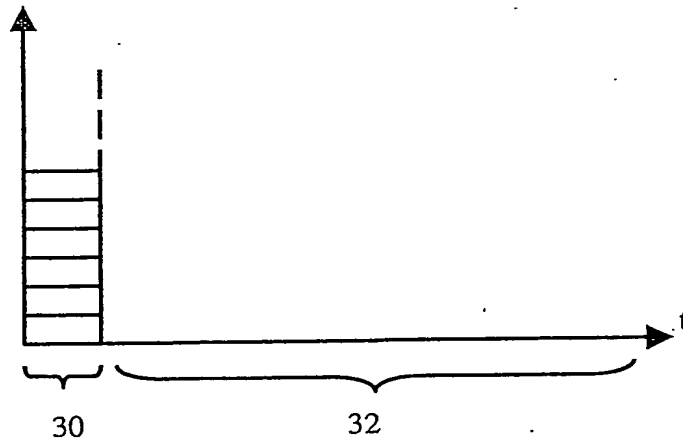


FIG. 7

Pixel Drive Current

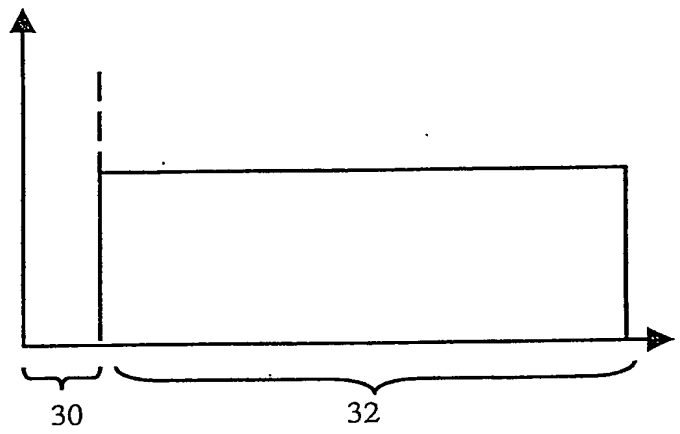


FIG. 8

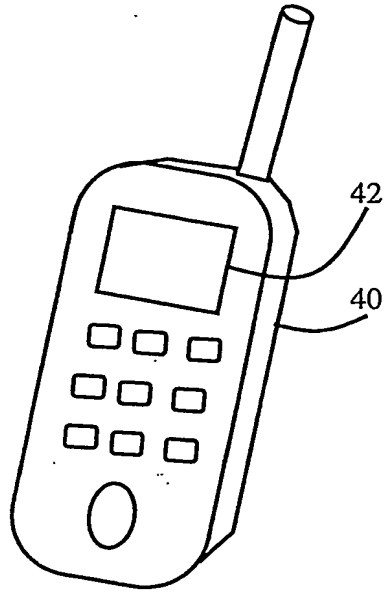


FIG. 9

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**